


AERODROME CHART (ADC) SÃO PEDRO DA ALDEIA/ Tenente Jorge Henrique Möller, MIL (SBES)

RJ-BRASIL

AD ELEV: 62'

ARP S22 49 00 W042 05 33

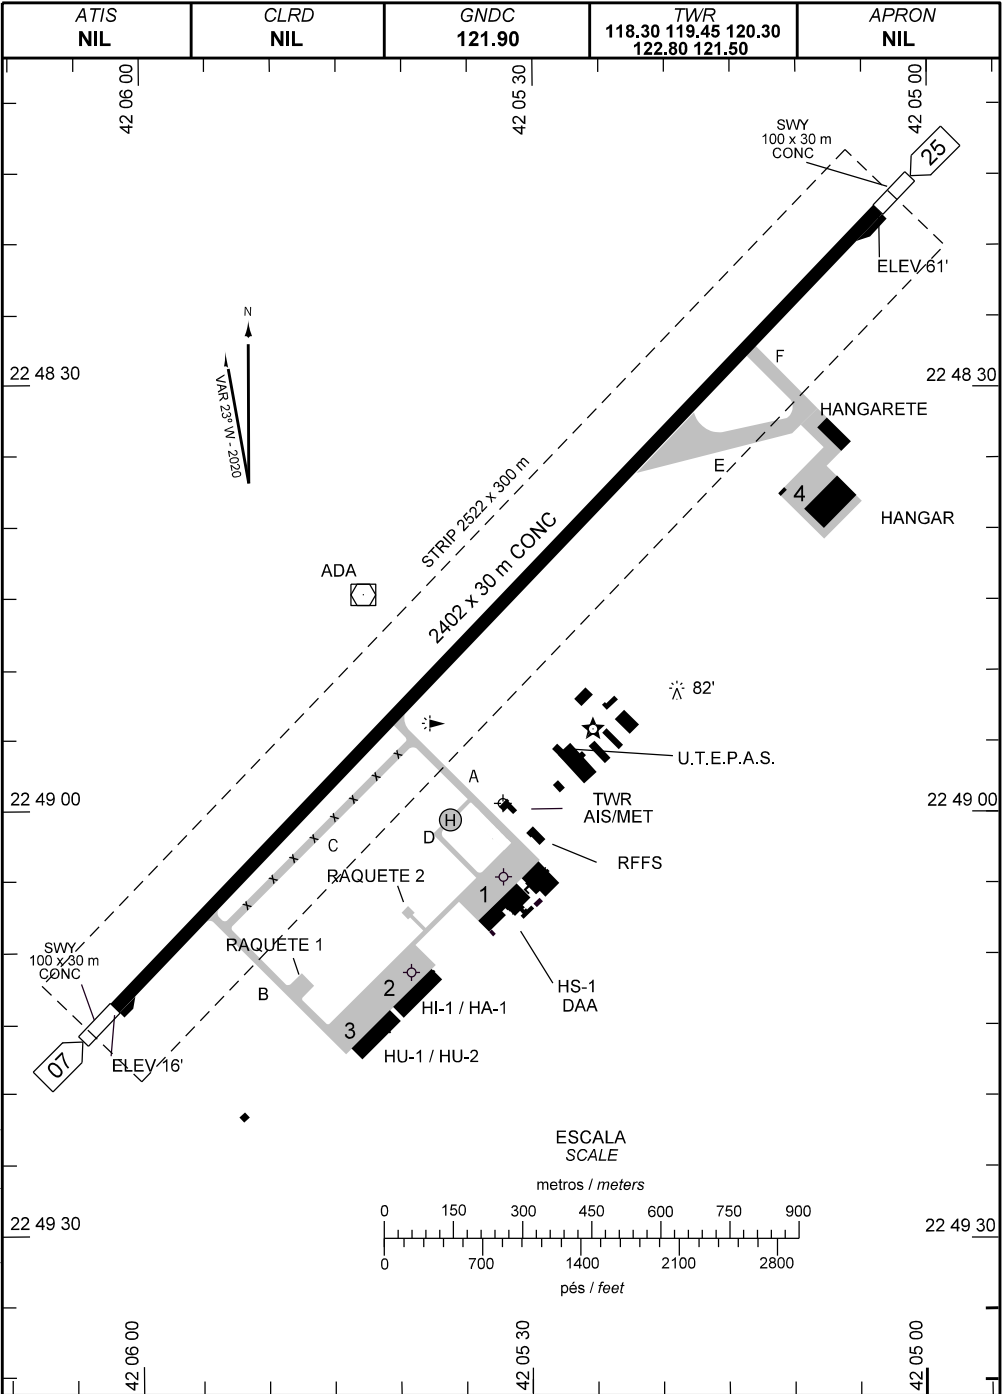


CHANGES: AD IDENT, DIST DECL, LAYOUT, STRIP.

ADC - SBES: INFORMAÇÕES COMPLEMENTARES / COMPLEMENTARY INFORMATION

CARACTERÍSTICAS FÍSICAS / PHYSICAL CHARACTERISTICS											
PISTA RUNWAY				DIMENSÕES(m) DIMENSIONS(m)				PCN	TIPO DE SUPERFÍCIE SURFACE KIND		
RWY	BRG MAG	Tipo Type	RCD	RWY	SWY	CWY	STRIP	RWY	RWY	SWY	
a	b	c	d	e	f	g	h	i	j	k	
07	067	NPA	2C	2402x30	100x30		2522	30/R/C/X/U	CONC	CONC	
25	247	NPA	2C		100x30		x 300			CONC	CONC

DISTÂNCIAS DECLARADAS, AUXÍLIOS VISUAIS E COORDENADAS DAS CABECEIRAS DECLARED DISTANCES, VISUAL AIDS AND THRESHOLD COORDINATES							
RWY	TORA(m)	TODA(m)	ASDA(m)	LDA(m)	AUXÍLIOS / AIDS	ALTURA GEOIDAL(m) GEOID HEIGHT(m)	COORDENADAS COORDINATES
07	2402	2402	2502	2402		- 6,02	S22 49 14 W042 06 03
25	2402	2402	2502	2402		- 6,02	S22 48 18 W042 05 04

SERVIÇO DE SALVAMENTO E CONTRAINCÊNDIO / RESCUE AND FIRE FIGHTING SERVICE: RFFS REQ - 3

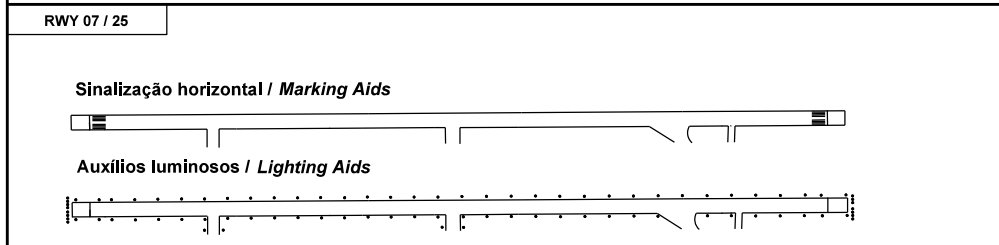

- RMK:**
- 1) ACFT DA MARINHA DO BRASIL EM VOO DE INSTRUÇÃO NA CTR-ES E PRÓXIMO AO AD.
ACFT OF THE BRAZILIAN NAVY IN TRAINING FLIGHT AT CTR-ES AND NEXT TO AD.
 - 2) OPR ESPECIAL NA RWY: ATENÇÃO PARA APARELHO DE PARADA EM EMERG PARA ACFT PROVIDAS DE GANCHO DE RECOLHIMENTO. CONSISTE DE TRÊS CABOS DE AÇO DISPOSTOS TRANSVERSALMENTE NA RWY PRINCIPAL EM CADA THR CONFORME ESPECIFICADO ABAIXO:
SPECIAL OPR ON THE MAIN RWY: EMERGENCY STOP ATTENTION FOR ACFT PROVIDED BY HOOK FOR COLLECTION CONSISTS OF THREE CABLES OF STEEL PROVIDED CROSSLY IN THE MAIN RWY IN EACH THR AS SPECIFIED BELOW:
 - A) APARELHO PRINCIPAL - CABO DE AÇO COM 3,5CM DE DIÂMETRO, 5CM DE ALT DA RWY, LOCALIZADO A 540M DA THR DA RWY.
MAIN APPARATUS - STEEL CABLE WITH 3.5CM DIAMETER, 5CM RWY HEIGHT, LOCATED AT 540M FROM THR THE RWY.
 - B) APARELHO DE EMERGÊNCIA - CABOS DE AÇO COM 3,0CM DE DIÂMETRO, 5CM DE ALT DA RWY, LOCALIZADO A 210 M DAS THR DA RWY.
EMERGENCY APPARATUS - STEEL CABLES WITH 3.0 CM OF DIAMETER, 5 CM OF RWY HEIGHT, LOCATED AT 210M FROM THR THE RWY.
 - 3) AD OPR ESPECIAL NA RWY PRINCIPAL: ATENÇÃO PARA ESPELHO DE LDG MEDINDO 2.30M DE HGT LOCALIZADO AO LADO ESQUERDO À DISTÂNCIA DE 290M DAS THR 07 / 25 E À DISTÂNCIA DE 19M DO EIXO DA RWY PRINCIPAL.
AD WITH SPECIAL OPERATION IN THE MAIN RWY: WARNING FOR MIRROR OF LDG MEASURING 2.30M HGT LOCATED ON THE LEFT SIDE OF 290M THE THR 07 / 25 AND 19M AWAY FROM THE MAIN RWY AXIS.

CHANGES: AD IDENT, DIST DECL, LAYOUT, STRIP.